


Tipo materiale		Cond.	C.Spec.	Massa vol.	$\delta \cdot 10^{-12}$	Spess.
STRATIGRAFIA		(W/m°C)	(J/kg°C)	(kg/m³)	(kg/msPa)	(cm)
1	Intonaco a base cementizia (interno)	0.700	1010	1400.0	18.00000	1.50
2	A62-60 o ALV. 25x30 H19 V60	0.166	840	700.0	21.00000	30.00
3	Isolante (EPS)	0.031	1340	20.0	4.00000	5.00
4	Intonaco a base cementizia	0.700	1010	1400.0	18.00000	1.50

VALORI IN REGIME STAZIONARIO				
Massa frontale	253.00	kg/m²		
Conduttanza	0.29	W/m²°C	0.25	kCal/m²h°C
Resistenza termica	3.46	m²C/W	4.03	m²h°C/kCal
Trasmittanza	0.28	W/m²°C	0.24	kCal/m²h°C

**48 dB POTERE FONOISOLANTE  $R_w$**

VALORI IN REGIME VARIABILE (periodo 24 ore)		
Fattore attenuazione (modulo/fase)	0.09	adim
SFASAMENTO	14.34	ore

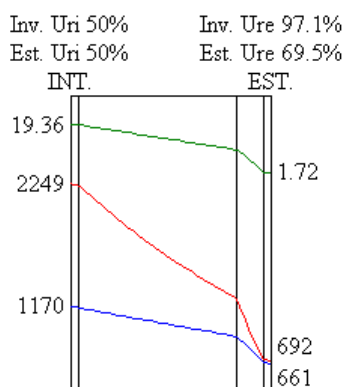

**LA STRUTTURA NON FORMA CONDENSA**